



100 Valley Street Lee, MA 01238  
 1-413-637-1060 (Office)  
 1-413-637-1164 (Fax)


**PRODUCT SPECIFICATION SHEET**

Product: **GCP 725 11/16"**

MAKEUP:

- Layer 1: **1/8" Heat Strengthened Glass**
- Layer 2: **0.05 Urethane**
- Layer 3: **3/8" Polycarbonate**
- Layer 4: **.05 Urethane**
- Layer 5: **1/8" Heat Strengthened Glass**

**ATTACK  
SIDE**

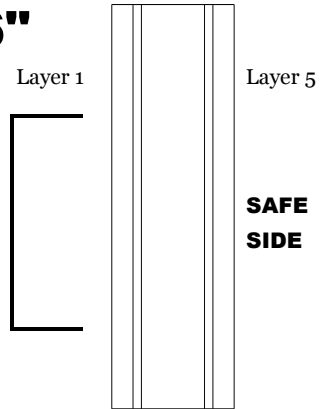

OPTIONS: Tinted Glass (Gray, Bronze, Green, Blue); Reflective Glass; One-way Mirror; Translucent  
 White Interlayer (Frosted Glass); Wire Glass; Insulating Units; Low E  
 Many more to choose from (please inquire)  
 Size and Thickness may not be available for every option

Thickness Average	Weight Lbs	Light Transmission	Dimensional Tolerance
0.725	5.96	84%	ASTM C 1349

STANDARDS: **ANSI Z97.1-1984 Safety Glazing Materials for Buildings.**  
**ASTM C 1036 Standard Specification for Flat Glass.**  
**ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass**

**BALLISTIC AND FORCED ENTRY RATINGS**

H.P. White TP-0500.02 Level I – Forced Entry  
 H.P. White Level B Ballistics – 9 mm (Low Spall)

Proprietary Information not for Public Distribution