



100 Valley Street Lee, MA 01238
 1-413-637-1060 (Office)
 1-413-637-1164 (Fax)


PRODUCT SPECIFICATION SHEET

Product: **GCP 750 3/4"**

MAKEUP:

- Layer 1: **1/8" Heat Strengthened Glass**
- Layer 2: **0.05 Urethane**
- Layer 3: **3/16" Polycarbonate**
- Layer 4: **.025 Urethane**
- Layer 5: **3/16" Polycarbonate**
- Layer 6: **.05 Urethane**
- Layer 7: **1/8" Heat Strengthened Glass**

**ATTACK
SIDE**

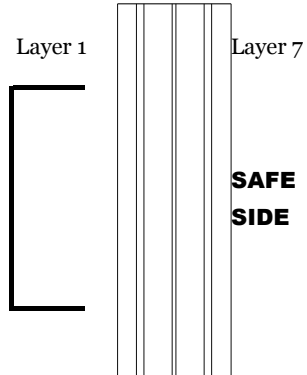

- OPTIONS:** Tinted Glass (Gray, Bronze, Green, Blue); Reflective Glass; One-way Mirror; Translucent
 White Interlayer (Frosted Glass); Wire Glass; Insulating Units; Low E
 Many more to choose from (please inquire)
 Size and Thickness may not be available for every option

| Thickness Average | Weight Lbs | Light Transmissior | Dimensional Tolerance |
|------------------------------|-----------------------|-------------------------------|----------------------------------|
| 0.736 | 6.06 | 84% | ASTM C 1349 |

- STANDARDS:** **ANSI Z97.1-1984 Safety Glazing Materials for Buildings.**
ASTM C 1036 Standard Specification for Flat Glass.
ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass

BALLISTIC AND FORCED ENTRY RATINGS

- H.P. White TP-0500.02 Level II – Forced Entry
- UL Level 1. 9 mm (Low Spall)
- H.P. White Level B Ballistics – 9 mm (Low Spall)
- WMFL Level III – 30 minute Physical Attack
- ASTM F-1915-03 Level 3

Proprietary Information not for Public Distribution