




100 Valley Street Lee, MA 01238
 1-413-637-1060 (Office)
 1-413-637-1164 (Fax)

PRODUCT SPECIFICATION SHEET

Product: **GCP 960 15/16"**

MAKEUP:

- Layer 1: **1/8" Glass**
- Layer 2: **0.05 Urethane**
- Layer 3: **3/16" Polycarbonate**
- Layer 4: **.025 Urethane**
- Layer 5: **3/16" Polycarbonate**
- Layer 6: **.025 Urethane**
- Layer 7: **3/16" Polycarbonate**
- Layer 8: **.05 Urethane**
- Layer 9: **1/8" Glass**

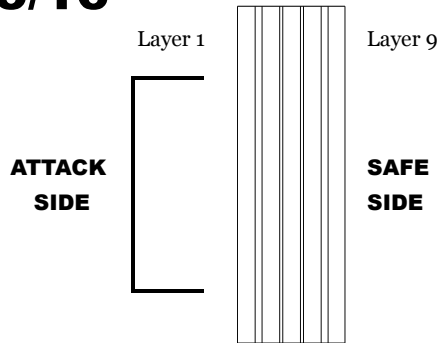

OPTIONS: Tinted Glass (Gray, Bronze, Green, Blue); Reflective Glass; One-way Mirror; Translucent
 White Interlayer (Frosted Glass); Wire Glass; Insulating Units; Low E
 Many more to choose from (please inquire)
 Size and Thickness may not be available for every option

Thickness Average	Weight Lbs	Light Transmission	Dimensional Tolerance
0.96	7.3	83%	ASTM C 1349

STANDARDS: **ANSI Z97.1-1984 Safety Glazing Materials for Buildings.**
ASTM C 1036 Standard Specification for Flat Glass.
ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass

BALLISTIC AND FORCED ENTRY RATINGS

H.P. White TP-0500.02 Level II – Forced Entry
 H.P. White Level B Ballistics – 9 mm (Low Spall) / 357 mag (Low Spall)
 WMFL Level II – 60 minute Physical Attack

Proprietary Information not for Public Distribution