



100 Valley Street Lee, MA 01238
 1-413-637-1060 (Office)
 1-413-637-1164 (Fax)


PRODUCT SPECIFICATION SHEET

Product: **LP 1000 1"**

MAKEUP:

- Layer 1: **1/8" Mar Resistant Polycarbonate**
- Layer 2: **.025 Urethane**
- Layer 3: **3/8" Polycarbonate**
- Layer 4: **.025 Urethane**
- Layer 5: **3/8" Polycarbonate**
- Layer 6: **.025 Urethane**
- Layer 7: **1/8" Mar Resistant Polycarbonate**

**ATTACK
SIDE**

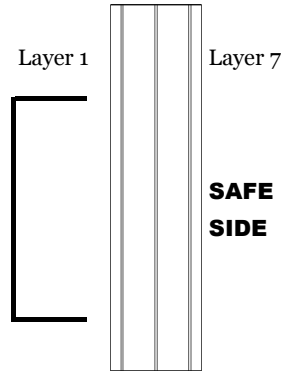

OPTIONS: Tinted Glass (Gray, Bronze, Green, Blue); Reflective Glass; One-way Mirror; Translucent
 White Interlayer (Frosted Glass); Wire Glass; Insulating Units; Low E
 Many more to choose from (please inquire)
 Size and Thickness may not be available for every option

Thickness Average	Weight Lbs.	Light Transmissior	Dimensional Tolerance
1	6.54	79%	ASTM C 1349

STANDARDS: **ANSI Z97.1-1984 Safety Glazing Materials for Buildings.**
ASTM C 1036 Standard Specification for Flat Glass.
ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass

BALLISTIC AND FORCED ENTRY RATINGS

H.P. White TP-0500.01 Level IV – Forced entry
 H.P. White Level B Ballistics – 9 mm
 U.L. Level II - .357 magnum