



100 Valley Street Lee, MA 01238  
 1-413-637-1060 (Office)  
 1-413-637-1164 (Fax)


**PRODUCT SPECIFICATION SHEET**

Product: **LP 750 3/4"**

MAKEUP:

- Layer 1: **1/8" Mar Resistant Polycarbonate**
- Layer 2: **.025 Urethane**
- Layer 3: **1/2" Polycarbonate**
- Layer 4: **.025 Urethane**
- Layer 5: **1/8" Mar Resistant Polycarbonate**

**ATTACK  
SIDE**

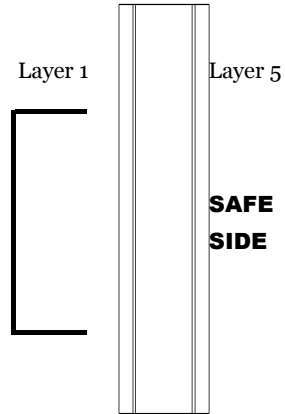

OPTIONS: Tinted Glass (Gray, Bronze, Green, Blue); Reflective Glass; One-way Mirror; Translucent  
 White Interlayer (Frosted Glass); Wire Glass; Insulating Units; Low E  
 Many more to choose from (please inquire)  
 Size and Thickness may not be available for every option

Thickness Average	Weight Lbs.	Light Transmissior	Dimensional Tolerance
<b>0.757</b>	<b>4.88</b>	<b>82%</b>	<b>ASTM C 1349</b>

STANDARDS: **ANSI Z97.1-1984 Safety Glazing Materials for Buildings.**  
**ASTM C 1036 Standard Specification for Flat Glass.**  
**ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass**

**BALLISTIC AND FORCED ENTRY RATINGS**

H.P. White TP-0500.01 Level III (step 21) – Forced entry  
 H.P. White Level B Ballistics – 9 mm