




100 Valley Street Lee, MA 01238
 1-413-637-1060 (Office)
 1-413-637-1164 (Fax)

PRODUCT SPECIFICATION SHEET

Product: **PAS 3500 1 1/4"**

MAKEUP:

- Layer 1: **1/8" Heat Strengthened Glass**
- Layer 2: **.025 Urethane**
- Layer 3: **3/16" Glass**
- Layer 4: **.05 Urethane**
- Layer 5: **1/4" Polycarbonate**
- Layer 6: **.025 Urethane**
- Layer 7: **1/4" Polycarbonate**
- Layer 8: **.05 Urethane**
- Layer 9: **3/16" Heat Strengthened Glass**
- Layer 10: **.025 Urethane**
- Layer 11: **1/8" Glass**
- Layer 12: **.015 Urethane**
- Layer 13: **1/32" Polycarbonate**
- Layer 14: **.022 Spall Shield**

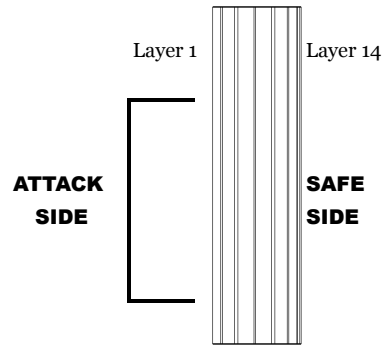

- OPTIONS: Tinted Glass (Gray, Bronze, Green, Blue); Reflective Glass; One-way Mirror; Translucent White Interlayer (Frosted Glass); Wire Glass; Insulating Units; Low E
 Many more to choose from (please inquire)
 Size and Thickness may not be available for every option

Thickness Average	Weight Lbs	Light Transmissior	Dimensional Tolerance
1.26	10.7	67%	ASTM C 1349

- STANDARDS: **ANSI Z97.1-1984 Safety Glazing Materials for Buildings.**
ASTM C 1036 Standard Specification for Flat Glass.
ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass

BALLISTIC AND FORCED ENTRY RATINGS

- U.L. 752 Listed Level III – 44 mag
- H.P. White TP-0500.02 Level III (Step 25) – Forced Entry
- WMFL Level 1 – 44 mag & 60 minute Physical Attack

Proprietary Information not for Public Distribution