




100 Valley Street Lee, MA 01238  
 1-413-637-1060 (Office)  
 1-413-637-1164 (Fax)

**PRODUCT SPECIFICATION SHEET**

Product: **PAS 50 Cal Ball 3"**

MAKEUP:

- Layer 1: **1/4" Glass**
- Layer 2: **.025 Urethane**
- Layer 3: **3/8" Glass**
- Layer 4: **.025 Urethane**
- Layer 5: **3/8" Glass**
- Layer 6: **.025 Urethane**
- Layer 7: **1/2" Glass**
- Layer 8: **.025 Urethane**
- Layer 9: **1/2" Glass**
- Layer 10: **.025 Urethane**
- Layer 11: **3/8" Glass**
- Layer 12: **.025 Urethane**
- Layer 13: **3/8" Glass**
- Layer 14: **.05 Urethane**
- Layer 15: **1/4" Mar Resistant Polycarbonate**

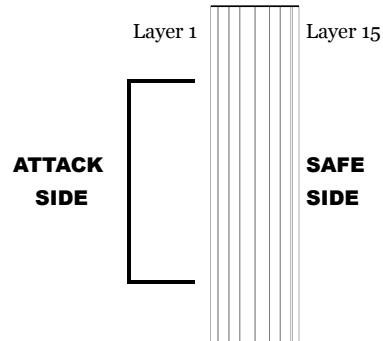

OPTIONS: Tinted Glass (Gray, Bronze, Green, Blue); Reflective Glass; One-way Mirror; Translucent White Interlayer (Frosted Glass); Wire Glass; Insulating Units; Low E  
 Many more to choose from (please inquire)  
 Size and Thickness may not be available for every option

Thickness Average	Weight Lbs	Light Transmissior	Dimensional Tolerance
3	39	61%	ASTM C 1349

STANDARDS: **ANSI Z97.1-1984 Safety Glazing Materials for Buildings.**  
**ASTM C 1036 Standard Specification for Flat Glass.**  
**ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass**

**BALLISTIC AND FORCED ENTRY RATINGS**

H.P. White - 50 Cal Ball (2750 fps)  
 UL Level 10

Proprietary Information not for Public Distribution