




100 Valley Street Lee, MA 01238  
 1-413-637-1060 (Office)  
 1-413-637-1164 (Fax)

**PRODUCT SPECIFICATION SHEET**

Product: **PAS UL-8 2 1/8"**

MAKEUP:

- Layer 1: **1/8" Heat Strengthened Glass**
- Layer 2: **.03 PVB**
- Layer 3: **3/8" Glass**
- Layer 4: **.03 PVB**
- Layer 5: **3/8" Glass**
- Layer 6: **.03 PVB**
- Layer 7: **1/4" Glass**
- Layer 8: **.05 Urethane**
- Layer 9: **1/8" Polycarbonate**
- Layer 10: **.05 Urethane**
- Layer 11: **1/4" Glass**
- Layer 12: **.05 Urethane**
- Layer 13: **1/4" Polycarbonate**
- Layer 14: **.025 Urethane**
- Layer 15: **1/8" Mar Resistant Polycarbonate**

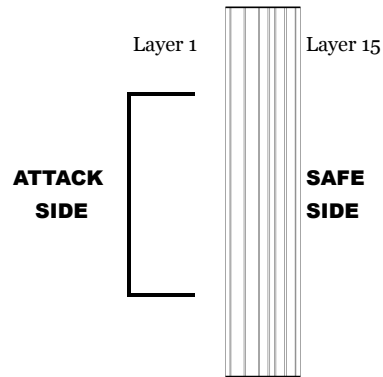

- OPTIONS: Tinted Glass (Gray, Bronze, Green, Blue); Reflective Glass; One-way Mirror; Translucent White Interlayer (Frosted Glass); Wire Glass; Insulating Units; Low E  
 Many more to choose from (please inquire)  
 Size and Thickness may not be available for every option

Thickness Average	Weight Lbs	Light Transmissior	Dimensional Tolerance
2.14	23	60%	ASTM C 1349

- STANDARDS: **ANSI Z97.1-1984 Safety Glazing Materials for Buildings.**  
**ASTM C 1036 Standard Specification for Flat Glass.**  
**ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass**

**BALLISTIC AND FORCED ENTRY RATINGS**

U.L. 752 Level 8 - 7.62 Military Ball