




100 Valley Street Lee, MA 01238
 1-413-637-1060 (Office)
 1-413-637-1164 (Fax)

PRODUCT SPECIFICATION SHEET

Product: **PAS 008 L/S 2 1/2"**

MAKEUP:

- Layer 1: **3/8" Glass**
- Layer 2: **.025 Urethane**
- Layer 3: **3/8" Glass**
- Layer 4: **.025 Urethane**
- Layer 5: **3/8" Glass**
- Layer 6: **.025 Urethane**
- Layer 7: **3/8" Glass**
- Layer 8: **.025 Urethane**
- Layer 9: **3/8" Glass**
- Layer 10: **.05 Urethane**
- Layer 11: **1/4" Polycarbonate**
- Layer 12: **.05 Urethane**
- Layer 13: **3/16" Glass**

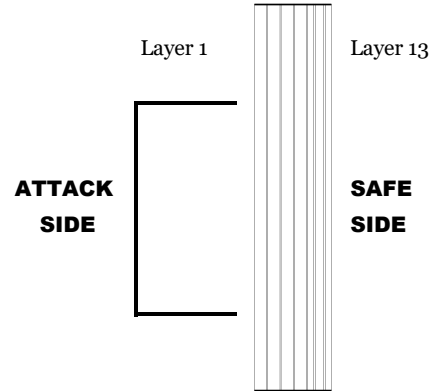

OPTIONS: Tinted Glass (Gray, Bronze, Green, Blue); Reflective Glass; One-way Mirror; Translucent White Interlayer (Frosted Glass); Wire Glass; Insulating Units; Low E
 Many more to choose from (please inquire)
 Size and Thickness may not be available for every option

Visible Light	U Value	Shading Coefficient	SHGC	Dimensional Tolerance	Thickness Average	Weight Lbs
65%	0.68	0.6	0.52	ASTM C 1349	2.47	29.4

STANDARDS: **ANSI Z97.1-1984 Safety Glazing Materials for Buildings.**
ASTM C 1036 Standard Specification for Flat Glass.
ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass

BALLISTIC AND FORCED ENTRY RATINGS

UL Level 7, 8 7.62 Ball
 NIJ Level 4