



100 Valley Street Lee, MA 01238
 1-413-637-1060 (Office)
 1-413-637-1164 (Fax)


PRODUCT SPECIFICATION SHEET

Product: **LP 1250 1 1/4"**

MAKEUP:

- Layer 1: **1/8" Mar Resistant Polycarbonate**
- Layer 2: **.025 Urethane**
- Layer 3: **1/2" Polycarbonate**
- Layer 4: **.025 Urethane**
- Layer 5: **1/2" Polycarbonate**
- Layer 6: **.025 Urethane**
- Layer 7: **1/8" Mar Resistant Polycarbonate**

**ATTACK
SIDE**

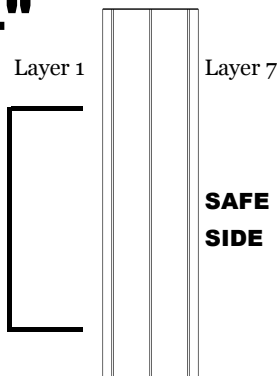

OPTIONS: Tinted Glass (Gray, Bronze, Green, Blue); Reflective Glass; One-way Mirror; Translucent
 White Interlayer (Frosted Glass); Wire Glass; Insulating Units; Low E
 Many more to choose from (please inquire)
 Size and Thickness may not be available for every option

Thickness Average	Weight Lbs.	Light Transmissior	Dimensional Tolerance
1.25	8.1	77%	ASTM C 1349

STANDARDS: **ANSI Z97.1-1984 Safety Glazing Materials for Buildings.**
ASTM C 1036 Standard Specification for Flat Glass.
ASTM C 1172 Standard Specification for Laminated Architectural Flat Glass

BALLISTIC AND FORCED ENTRY RATINGS

- H.P. White Level C Ballistics – .44 magnum
- U.L. Level III - .44 magnum
- NIJ STD-0108.01 Level IIIA - .44 magnum
- WMFL Level 1 - .44 magnum and 60 minute Physical Attack